


Click Grip® Self-adhesive Flexible Sub Seal is a market leading water and vapour tight seal with terrific movement and weather resistance properties.

Protecting buildings from water and vapour ingress Click Grip® seals building openings and self heals around mechanical penetrations to provide a total solution.

Adheres well to most building substrates down to 5°C, Click Grip® allows for a continuous seal where previously overlaps have been required.

- ❖ Prevents unwanted moisture intrusion in to building elements
- ❖ Outstanding movement properties, will not harden or crack in cold conditions
- ❖ Self Heals around mechanical penetrations

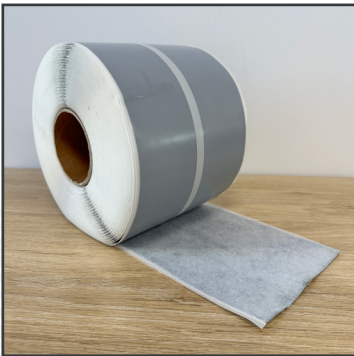




Technical Details

Laminate:	Flexible Polyester Fleece
Adhesive:	Butyl Rubber
Adhesive Thickness:	0.8mm
Peel Strength:	10 N/cm
Density:	1.5 g/cm ³
Water Tightness:	>0.1Mpa
Sd Value:	>80m
Application Temperature:	5°C to 35°C

Important Information

Complies with:

-  AS 2047 7.2.2 Flashing & 7.3.1 General
-  NCC 2022 H2F2 Weatherproofing & Dampness
-  NCC 2022 H2P2 Weatherproofing

Must be covered within 1 month of application to prevent UV damage

Forms part of Click IN Systems™ Window Installation Methodology

Surface Preparation

Surfaces must be clean, dry and free of dust. In the case of friable, porous or fragile surfaces, it is advisable to stabilise them with a liquid primer.

Delivery Form

Code	Width	Length	kg/roll	Qty
CI150GY150/25/R	150mm	25m	5.5kg	1